
# **RLM-1632-6F Series Current Sensor Resistor (Lead / Halogen Free)**

### **Features / Applications:**

- High power rating is up to 1W
- Low TCR current sensor
- Low thermal EMF (< 3 µV/°C)
- Resistors are ideal for all types of current sensing
- Metal foil construction; Excellent long-term stability
- Moisture sensitivity level: MSL 1
- RoHS compliant

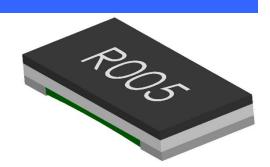


### **Electrical Specifications:**

Characteristics <sup>1</sup>	Feature	
Power Rating <sup>2</sup>	1 W	
Resistance Value(mΩ)	1	2 to 20
Temperature Coefficient of Resistance(ppm/°C)	± 150	± 100
Operation Temperature Range	-55°C to +170°C	
Maximum Working Voltage (V)	( P*R) <sup>1/2</sup>	

#### Note:

- 1. For detailed information see table on page 3
- 2. For sensors operated at ambient temperature in excess of 70°C, the maximum load shall be derated in accordance with the following curve.

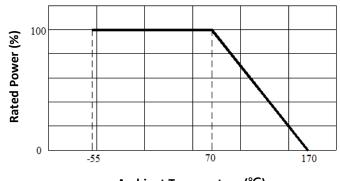

Ambient Temperature (°C)


Figure 1. : Power Temperature Derating Curve

DOCUMENT : SK46-NH PAGE : 1

PAGE : 1 REVISION : A4

### **Outline Drawing:**



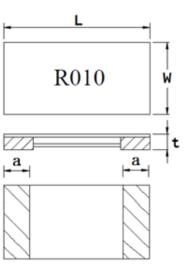

Resistance Range(mΩ)	L	w	а	t
1	3.20±0.20	2 2010 20 4 50 4 0 20	1.05 ± 0.20	
2			0.50 ± 0.15	0.60+0.30
3		1.60 ± 0.20	0.65 ± 0.15	0.60± 0.20
4 to 20			0.50 ± 0.15	

(Unit:mm)

### **Type Designation:**

 $R\ L\ M-1\ 6\ 3\ 2-6F-\ \square\square\square\square\ -\ \squareNH$ 

(1) (2) (3) (4) (5)

Note:

(1) Series No.

(2) Size

(3) Power Rating :6F = 1W

(4) Resistance value :  $R002 = 2 \text{ m}\Omega$ ;  $R010 = 10\text{m}\Omega$ 

(5) Tolerance: ±1%(F), ±2%(G), ±5%(J)

DOCUMENT : SK46-NH PAGE : 2 REVISION : A4



## **Available standard resistance values:**

Resistance	Tolerance		
Values	±1.0%	±2.0%	±5.0%
R001	✓	✓	✓
R002	✓	✓	✓
R003	✓	✓	✓
R004	✓	✓	✓
R005	✓	✓	✓
R006	✓	✓	✓
R007	✓	<b>✓</b>	✓
R008	✓	✓	✓
R009	✓	✓	✓
R010	✓	✓	✓
R015	✓		
R020	✓	✓	✓

✓ = available

Further values and tolerances on request.

DOCUMENT : SK46-NH PAGE : 3 REVISION : A4



## **Reliability Performance:**


Test Item	Condition of Test	Requirements
Short Time Overload	2.5 x Rated power for 5 seconds Refer to JIS C 5201-1 4.13	ΔR: ±1.0%
Thermal Cycling	-55 to 125℃ 100 cycles, 15 min at each extreme condition Refer to JIS C 5201-1 4.19	ΔR: ±1.0%
Low Temperature Storage	Kept at -55℃, 1000 hours Refer to JIS C 5201-1 4.23.4	ΔR: ±1.0%
Resistance to Soldering Heat	Dipped into solder at $260 \pm 5^{\circ}$ C for $10 \pm 1$ seconds Refer to JIS C 5201-1 4.18	ΔR: ±1.0%
Load Life	Rated voltage for 1.5hours followed by a pause 0.5hour at 70 ± 3℃ Cycle repeated 1000 hours Refer to JIS C 5201-1 4.25	ΔR: ±1.0%
Damp Heat with Load	40 ± 2°C with relative humidity 90% to 95%. D.C. rated voltage for 1.5 hours ON and 30 minutes OFF. Cycle repeated 1,000 hours Refer to JIS C 5201-1 4.24	ΔR: ±1.0%
High Temperature Exposure	Kept at 170°C for 1000 hours Refer to JIS C 5201-1 4.23.2	ΔR: ±1.0%
Solderability	Temperature of Solder : $245 \pm 5^{\circ}$ C Immersion Duration : $3 \pm 0.5$ second Refer to JIS C 5201-1 4.17	Uniform coating of solder cover minimum of 95% surface being immersed
Mechanical Shock	100 G's for 6milliseconds. 5 pulses Refer to JIS C 5201-1 4.21	ΔR: ±1.0%
Substrate Bending	Glass-Epoxy board thickness : 1.6mm Bending width : 2mm Between the fulcrums : 90mm Refer to JIS C 5201-1 4.33	ΔR: ±1.0%

Note: Measurement at 24±4 hours after test conclusion for all reliability tests-parts.

DOCUMENT : SK46-NH PAGE : 4 REVISION : A4




### **Recommend Solder Pad Dimensions:**

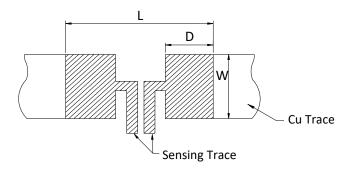

Dimensions (mm)	W	L	D
1	1.78	4.14	1.57
2 to 20			1.37

## Packaging:

### Tape packaging dimensions:

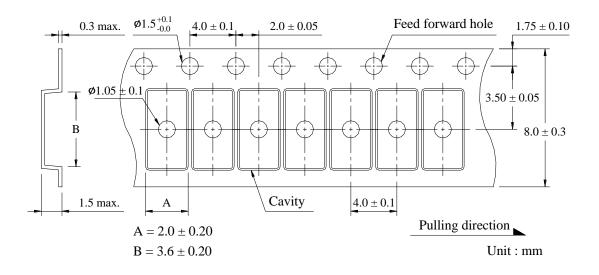


DOCUMENT : SK46-NH PAGE : 5

PAGE: 5 REVISION: A4




#### Reel dimensions:

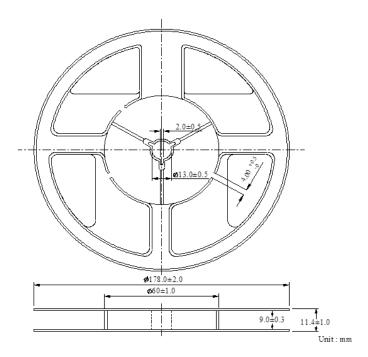

### Peel Strength of Top Cover Tape:

The peel speed shall be about 300mm/min.

The peel force of top cover tape shall between 0.1 to 0.7N

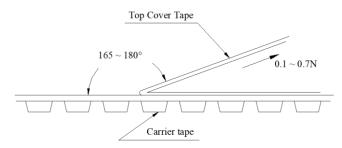

### Number of Taping:

4,000 pieces / reel

#### **Label Marking:**


The following items shall be marked on the reel.

- (1) Type designation
- (2) Quantity
- (3) Manufacturing date code
- (4) Manufacturer's name
- (5) The country of origin

DOCUMENT : SK46-NH

PAGE: 6
REVISION: A4

### **Recommend Soldering Conditions:**

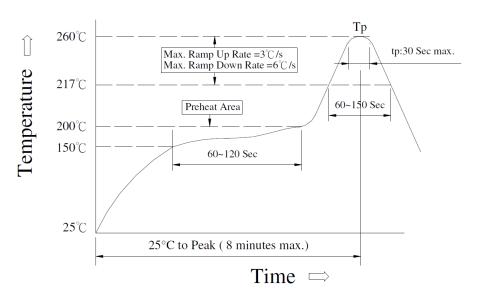

### Meet JEDEC-020D

#### (1) Reflow Soldering Method:

Reflow Soldering	Tp:255 to 260°C Max.30 seconds ( Tp )
	217°C 60 to 150 seconds
Pre-Heat	150 to 200℃ 60 to 120 seconds
Time 25℃ to peak temperature	8 minutes max

(2) Soldering Iron Method: 350± 5°C max.3 seconds

DOCUMENT : SK46-NH

PAGE: 7 REVISION: A4



#### **Care Note:**

#### Care note for storage

- (1) Current sensor shall be stored in a environment where temperature and humidity must be controlled (temperature 5 to 40°C, humidity 30 to 80% RH) . However, the humidity should be maintained as low as possible.
- (2) Current sensor shall not be stored under direct sunlight.
- (3) Current sensor shall be stored in condition without moisture, dust, any material defect solderability, or hazardous gas (i.e. Chlorination hydrogen, sulfurous acid gas, and sulfuration hydrogen)
- (4) The sensor can be stored for at least one year under the condition mentioned above.

#### Care note for operating and handling

- (1) It is necessary to protect the edge and protection coat of resistors from mechanical stress.
- (2) Handle with care when printing circuit board (PCB) is divided or fixed on support body, because bending of printing circuit board (PCB) mounting will make mechanical stress for resistors.
- (3) Resistors shall be used with in rated range shown in specification. Especially, if voltage more than specified value will be loaded to resistor, there is a case it will make damage for machine because of temperature rise depending on generating of heat, and increase resistance value or breaks.
- (4) In case that resistor is loaded a rated voltage, it is necessary to confirms temperature of a resistor and to reduce a load power according to load reduction curve, because a temperature rise of a resistor depends on influence of heat from mounting density and neighboring element.
- (5) Observe Limiting element voltage and maximum overload voltage specified in each specification
- (6) If there is possibility that a large voltage (pulse voltage, shock voltage) charge to resistor, it is necessary that operating condition shall be set up before use.

**DOCUMENT: SK46-NH PAGE** : 8

REVISION : A4