Ccyntec

Current Sensor Resistor

RLM-0603-K Series Current Sensor Resistor (Lead / Halogen Free)

Features / Applications :

- Power rating is up to 1/5W
- Low TCR current sensor
- Resistors are ideal for all types of current sensing
- Metal foil construction; Excellent long-term stability
- Moisture sensitivity level: MSL 1
- RoHS compliant

Electrical Specifications :

| Characteristics ¹ | Feature |
|---|-----------------------|
| Power Rating ² | 1/5 W |
| Resistance Value(mΩ) | 5 、 10 、 20 mΩ |
| Temperature Coefficient of Resistance(ppm/°C) | ± 150 |
| Operation Temperature Range | -55°C to +125°C |
| Maximum Working Voltage (V) | (P*R) ^{1/2} |

Note :

1. For detailed information see table on page 3

2. For sensors operated at ambient temperature in excess of 70°C, the maximum load shall be derated in accordance with the following curve.


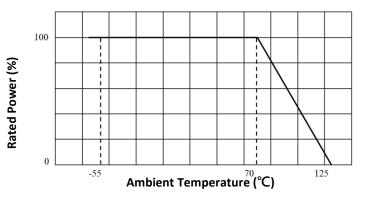



Figure 1. : Power Temperature Derating Curve



Outline Drawing :

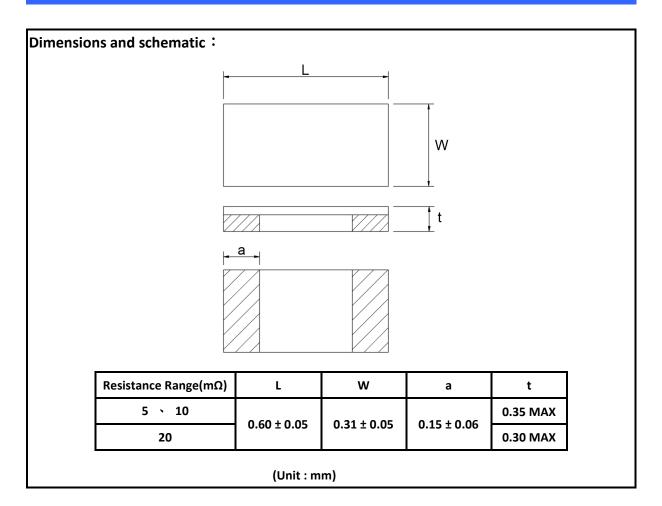

Type Designation :





Available standard resistance values :

| Resistance | Tolerance | |
|------------|-----------|-------|
| Values | ±1.0% | ±2.0% |
| R005 | ~ | ✓ |
| R010 | 1 | ✓ |
| R020 | ✓ | ✓ |

✓ = available

Further values and tolerances on request.




Reliability Performance :

| Test Item | Condition of Test | Requirements |
|------------------------------|---|--|
| Short Time Overload | 2.5 x Rated power for 5 seconds Refer to JIS C 5201-1 4.13 | $\Delta R \div 1.0\%$ |
| Thermal Cycling | -55 to 125℃ 100 cycles, 15 min at each extreme condition Refer to JIS C 5201-1 4.19 | ∆R : ± 2.0% |
| Low Temperature Storage | Kept at -55℃, 1000 hours Refer to JIS C 5201-1 4.23.4 | ∆R : ± 2.0% |
| Resistance to Soldering Heat | Dipped into solder at $260 \pm 5^{\circ}$ C for 10 ± 1 seconds Refer to JIS C 5201-1 4.18 | ∆R : ± 1.0% |
| Load Life | Rated voltage for 1.5hours followed by a pause 0.5hour at $70 \pm 3^{\circ}$ C Cycle repeated 1000 hours Refer to JIS C 5201-1 4.25 | ∆R : ± 2.0% |
| Damp Heat with Load | p Heat with Load D.C. rated voltage for 1.5 hours ON and 30 minutes OFF. Cycle repeated 1,000 hours Refer to JIS C 5201-1 4.24 | |
| High Temperature Exposure | Kept at 125° for 1000 hours $\Delta R : \pm$ Refer to JIS C 5201-1 4.23.2 | |
| Solderability | Temperature of Solder : $245 \pm 5^{\circ}$ C Immersion Duration : 3 ± 0.5 second Refer to JIS C 5201-1 4.17 | Uniform coating of solder cover minimum of 95% surface being immersed |
| Mechanical Shock | 100 G's for 6milliseconds. 5 pulses Refer to JIS C 5201-1 4.21 | ∆R : ± 1.0% |
| Substrate Bending | Glass-Epoxy board thickness : 1.6mm Bending width : 2mm Between the fulcrums : 90mm Refer to JIS C 5201-1 4.33 | ΔR:±1.0% |

Note : Measurement at 24 \pm 4 hours after test conclusion for all reliability tests-parts.




Recommend Solder Pad Dimensions :

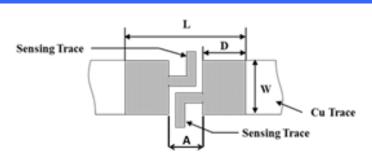

| Dimensions (mm) | W | L | D | Α |
|-----------------|------|------|-----|------|
| 5 、 10、20 m Ω | 0.32 | 0.75 | 0.3 | 0.15 |

Packaging :


Tape packaging dimensions :

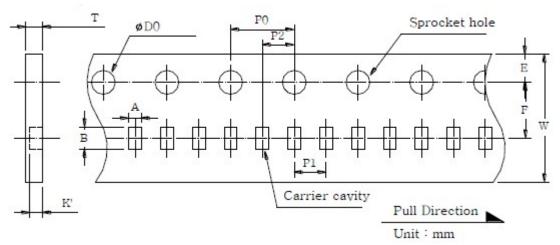

| Α | $\textbf{0.38} \pm \textbf{0.02}$ | F | $\textbf{3.50} \pm \textbf{0.05}$ | 10P0 | $\textbf{40.00} \pm \textbf{0.20}$ |
|----|-----------------------------------|----|-----------------------------------|------|------------------------------------|
| В | $\textbf{0.68} \pm \textbf{0.02}$ | P1 | $\textbf{2.00} \pm \textbf{0.05}$ | K' | $\textbf{0.28} \pm \textbf{0.02}$ |
| D0 | $\textbf{1.55} \pm \textbf{0.03}$ | P2 | $\textbf{2.00} \pm \textbf{0.05}$ | т | $\textbf{0.42} \pm \textbf{0.02}$ |
| E | 1.75 ± 0.05 | P0 | $\textbf{4.00} \pm \textbf{0.10}$ | | |

Unit : mm




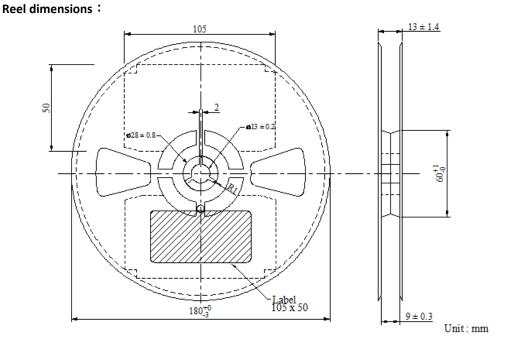

Peel Strength of Top Cover Tape :

The peel speed shall be about 300mm/min.

The peel force of top cover tape shall between 0.1 to 0.7N

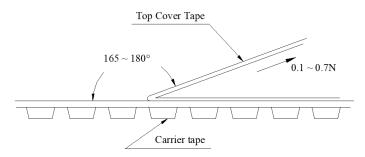

Number of Taping :

10,000 pieces / reel

Label Marking :


The following items shall be marked on the reel.

(1) Type designation

- (2) Quantity
- (3) Manufacturing date code
- (4) Manufacturer's name
- (5) The country of origin



Recommend Soldering Conditions: :

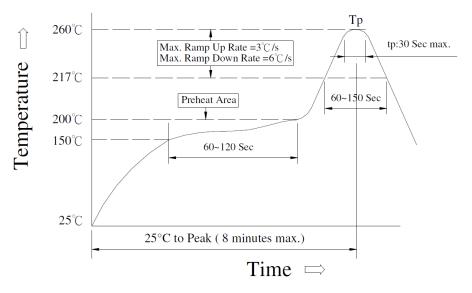

Meet JEDEC-020D

(1) Reflow Soldering Method :

| Reflow Soldering | Tp:255 to 260°C Max.30 seconds (Tp) |
|---|--|
| | 217°C 60 to 150 seconds |
| Pre-Heat | 150 to 200 $^\circ\!\!\!C$ 60 to 120 seconds |
| Time 25° \mathbb{C} to peak temperature | 8 minutes max |

(2) Soldering Iron Method : $350\pm 5^{\circ}C$ max.3 seconds



Care Note :

Care note for storage

- (1) Current sensor shall be stored in a environment where temperature and humidity must be controlled (temperature 5 to 40°C, humidity 30 to 80% RH). However, the humidity should be maintained as low as possible.
- (2) Current sensor shall not be stored under direct sunlight.
- (3) Current sensor shall be stored in condition without moisture, dust, any material defect solderability, or hazardous gas (i.e. Chlorination hydrogen, sulfurous acid gas, and sulfuration hydrogen)
- (4) The sensor can be stored for at least one year under the condition mentioned above.

Care note for operating and handling

- (1) It is necessary to protect the edge and protection coat of resistors from mechanical stress.
- (2) Handle with care when printing circuit board (PCB) is divided or fixed on support body, because bending of printing circuit board (PCB) mounting will make mechanical stress for resistors.
- (3) Resistors shall be used with in rated range shown in specification. Especially, if voltage more than specified value will be loaded to resistor, there is a case it will make damage for machine because of temperature rise depending on generating of heat, and increase resistance value or breaks.
- (4) In case that resistor is loaded a rated voltage, it is necessary to confirms temperature of a resistor and to reduce a load power according to load reduction curve, because a temperature rise of a resistor depends on influence of heat from mounting density and neighboring element.
- (5) Observe Limiting element voltage and maximum overload voltage specified in each specification
- (6) If there is possibility that a large voltage (pulse voltage, shock voltage) charge to resistor, it is necessary that operating condition shall be set up before use.