

The history of revision change for the specification

Document	REV.	Modified date	Description
CYNVF-21Y-007	A0	2021.11.30	New Approval
CYNVF-21Y-007	A1	2022.02.23	<ol style="list-style-type: none"> 1. Nov.,2021 -> Feb., 2022 2. Update Outline Dimensions G: 4.0max. -> 4.1max. 3. Year code 2021 = 1 -> 2022 = 2 4. Update Tape packaging dimensions <ul style="list-style-type: none"> 5.5+/-0.1 -> 5.5+/-0.05 2.0+/-0.1 -> 2.0+/-0.05 Dimensions Code <ul style="list-style-type: none"> A0: 2.7+/-0.1 -> 2.75+/-0.05 B0: 3.9+/-0.1 -> 4.10+/-0.05 Update Reel dimensions <ul style="list-style-type: none"> 13.0+/-1.0 -> 13.0+0.5/-0.2 20.0+/-0.5 -> 20.2 min.
CYNVF-21Y-007	A2	2022.04.07	<ol style="list-style-type: none"> 1. Feb. -> Apr. 2. Remove notice "Preliminary specification" 3. Add "AEC-Q200" logo 4. Add notice "AEC-Q200 qualified" in Features
CYNVF-21Y-007	A3	2023.12.07	<ol style="list-style-type: none"> 1. Apr., 2022 -> Dec., 2023 2. Year code 2022 = 2 -> 2023 = 3 3. Add Specifications Note5: We do not recommend the use of conformal coating, please discuss with us if you have this requirement.

AEC-Q200

Wire-wound Common Mode Choke VFE3225 NB Series

■ Features

Compatible with OPEN Alliance: IEEE 1000BASE-T1 EMC Test Specification for Common Mode Chokes, Version 2.0

Operating temperature -40°C~125°C

Suitable for lead-free reflow soldering


Compliance with RoHS and Halogen Free

AEC-Q200 qualified



■ Application

Noise suppression for automotive Ethernet system


■ Outline Dimensions

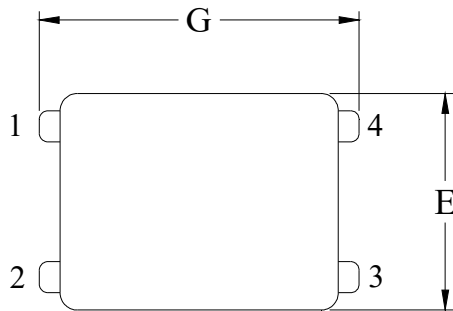


Code	Dimensions (mm)
A	3.4 Max.
B	0.6 ± 0.1
C	0.5 ± 0.1
D	0.5 ± 0.1
E	2.5 ± 0.2
F	2.6 Max.
G	4.1 Max.

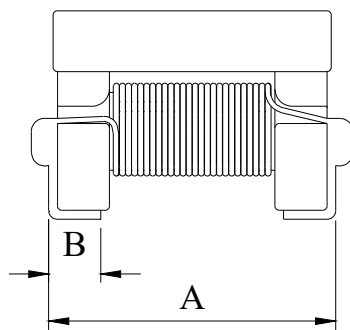

■ Schematic

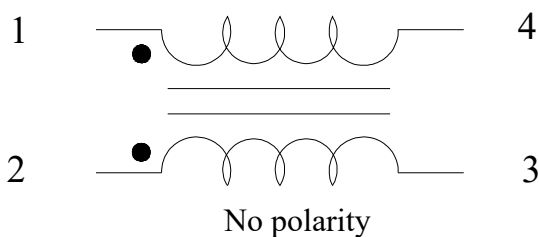

■ Recommend Land Pattern Dimensions

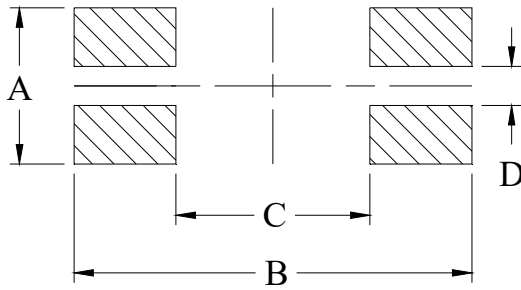

A	1.6
B	4.1
C	2.0
D	0.4

Unit : mm

■ Marking and Date Code


(1) Marking

The inductor is marked with a 3-digit code

Example -- 80 μ H → 800

(2) Date Code

X XX XX
 (1) (2) (3)



Where (1) Year Code

Ex : 2023 = 3

(2) Weekly Code

Serial number : 01 ~ 53

(3) Taping No.

Serial number : 001 ~ ZZZ

Specifications

Part Number	Common Mode Inductance (μH) Note2 ◇	DCR (Ω) ◇	Rated Current (mA)	Rated Voltage (Vdc)	Insulation Resistance ($\text{M}\Omega$)
		Max.	Max.	Max.	Min.
VFE3225-800NB	80	2.4	70	80	10

◇ : Significant Characteristic

*Inductance Tolerance : -30% / +50%

Note 1. : All test data is referenced to 25°C ambient.

Note 2. : Test Condition: 100KHz, 0.1Vrms

Note 3. : Operating Temperature Range -40°C to +125°C

Note 4. : Cleaning Process Note


(a) If this power choke is dipped in the cleaning agent, such as toluene, xylene, ketone, and ether system, there is a possibility that the performance decreases greatly

(b) The high power ultrasonic washing may damage the choke body.

(c) Please contact us if you need the cleaning via the above agents or ultrasonic washing.


Note 5. : We do not recommend the use of conformal coating, please discuss with us if you have this requirement.

Impedance VS. Frequency Characteristic

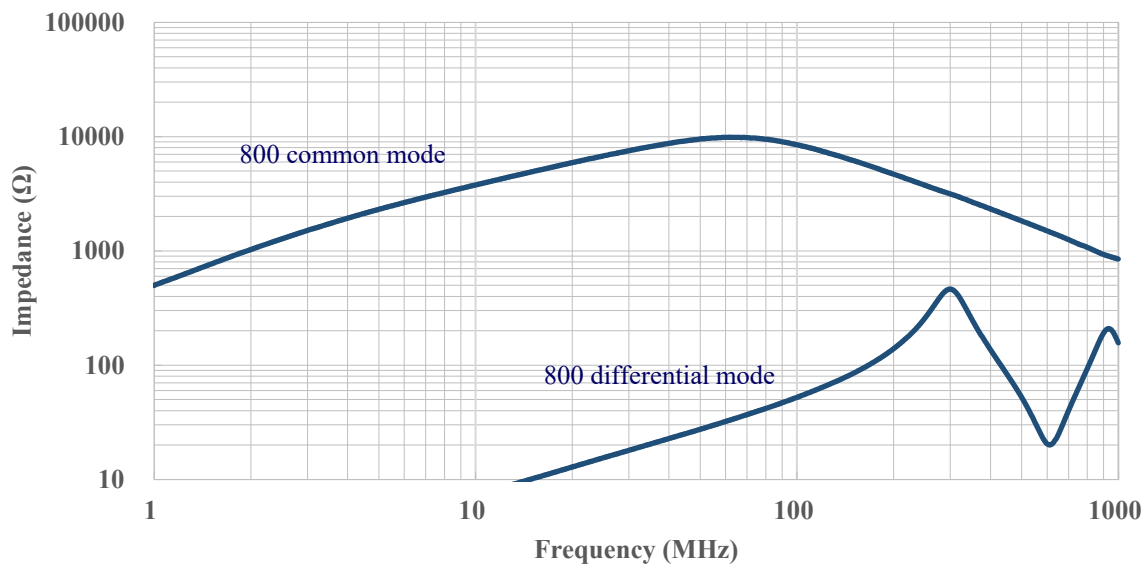

■ Packaging


(1) Tape packaging dimensions

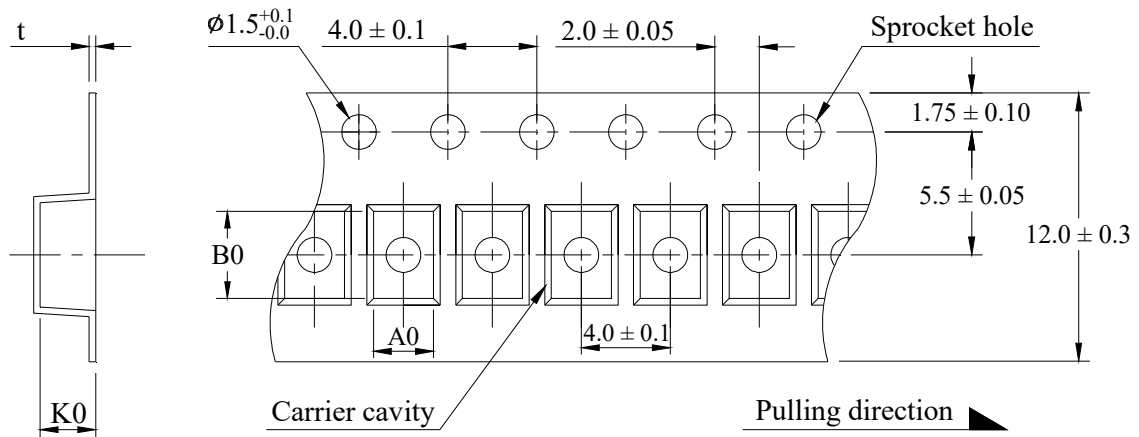


Dimensions Code (mm)				UNITS/REEL
A0	B0	K0	t	
2.75 ± 0.05	4.10 ± 0.05	2.8 ± 0.1	0.35 ± 0.10	5,000

(2) Tape direction

The direction shall be seen from the top cover tape side.

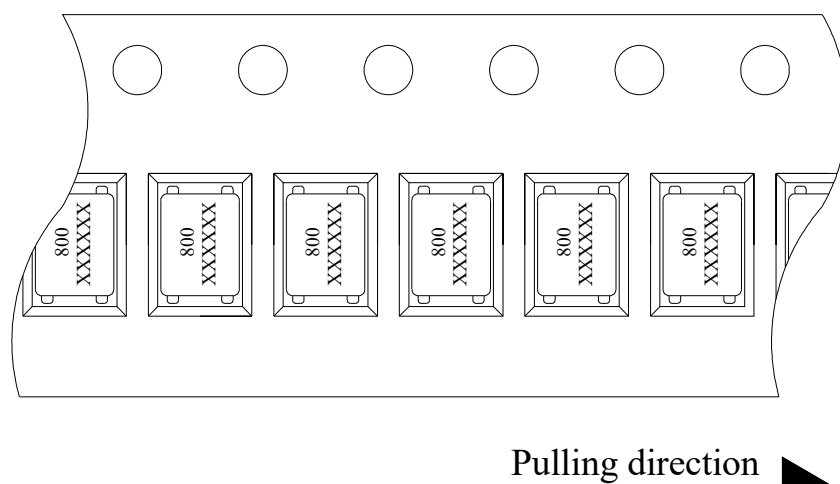

(3) Reel dimensions

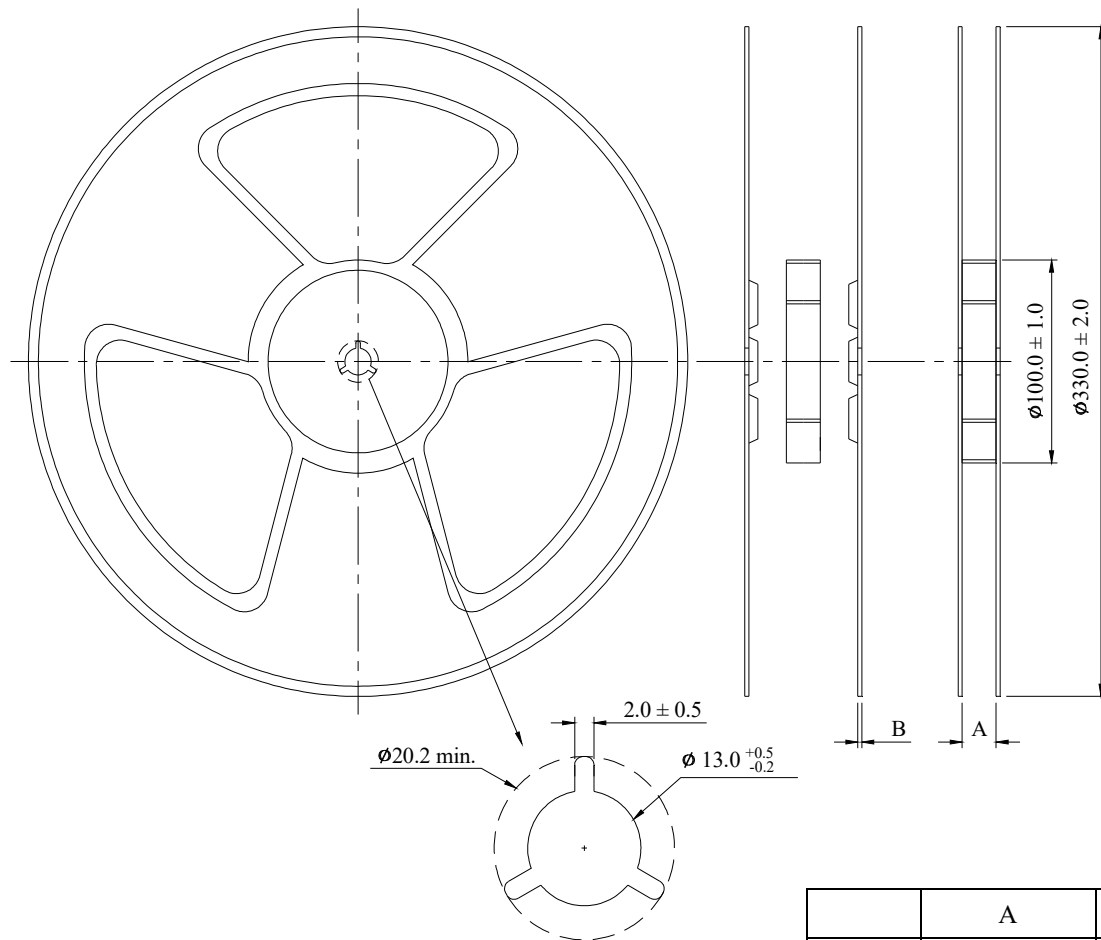


	A	B
mm	12.5 ± 0.5	2.0 ± 0.2


(4) Peel force of top cover tape

The peel speed shall be about 300 mm/minute.

The peel force of top cover tape shall be between 0.1 to 1.3N.

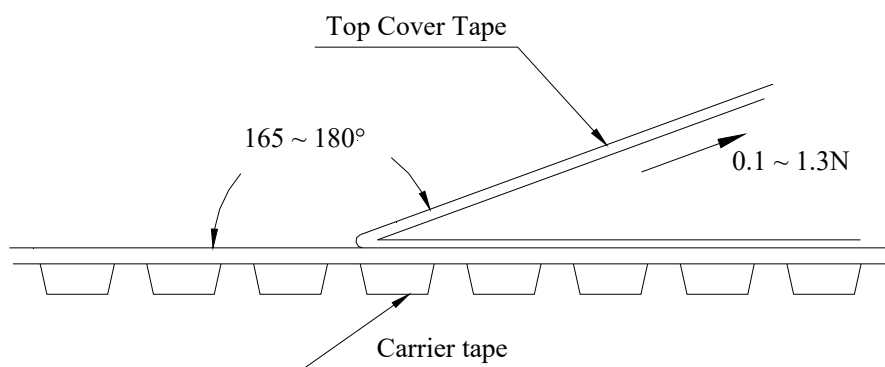

■ Reflow profile

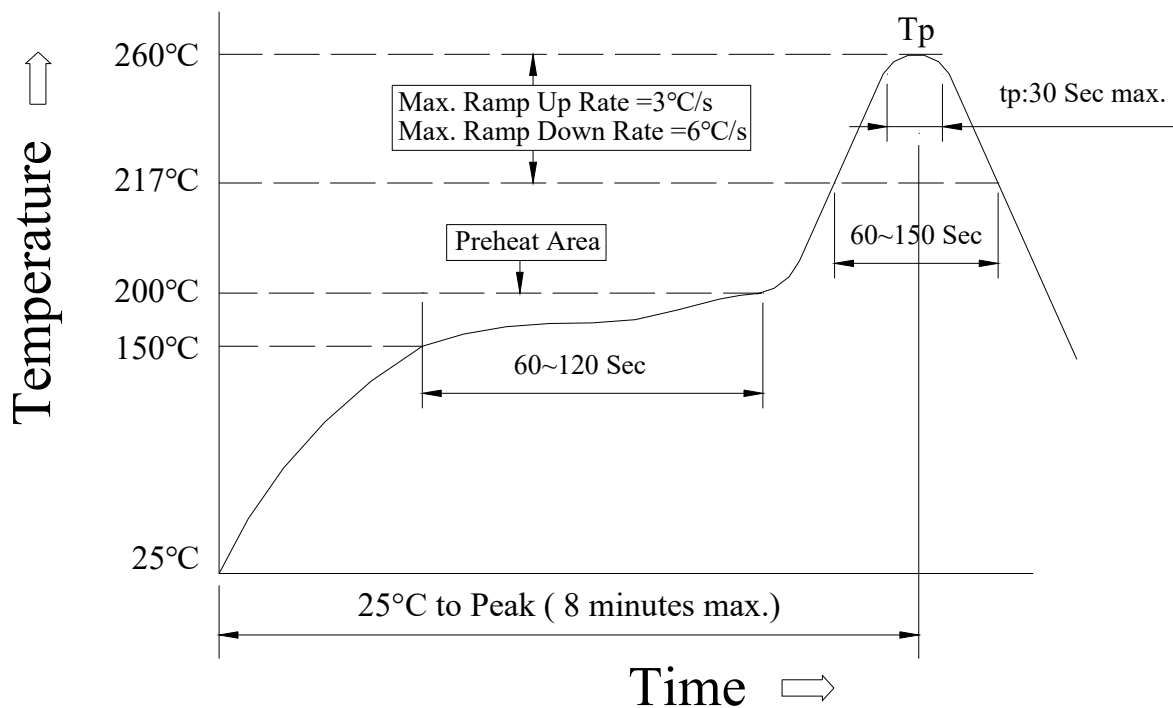

(1) Reflow Soldering Method :

Reflow Soldering	Tp:255~260°C	Max.30 seconds (tp)
	≥ 217°C	60~150 seconds
Pre-Heat	150 ~ 200°C	60~120 seconds
Time 25°C to peak temperature	8 minutes max.	

(2) Soldering iron Method : 350 ± 5°C max.3 seconds