
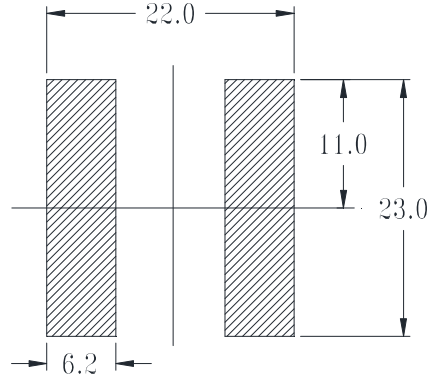


CYNTEC CO., LTD.




乾坤科技股份有限公司

HMP2312 Series

Mechanical dimensions



Suggested PWB Layout(mm)

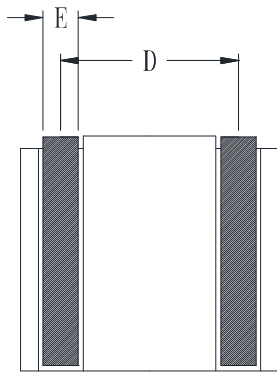

UNIT : mm

A = 23.5 MAX

B = 23.5 MAX

C = 12.0 MAX

D = 16.1

E = 4.0

Electrical Characteristics: @25°C, 100kHz, 1V

Delta P/N	L ¹ (uH)	Li (uH)	DCR (mΩ) MAX	Isat ² (A)	Ir ³ (A)
HMP2312-2R0A	2.0	1.35	0.7	60	75

1. Tolerance of inductance : ± 10%
2. Isat is the DC current which causes the inductance drop not less than Li
3. Ir is the DC current which causes the surface temperature of the part increase approximately 45 °C.
4. Operating temperature: -40°C to 125°C (Self-temperature rise included).